

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 223 421 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
17.07.2002 Bulletin 2002/29

(51) Int Cl.7: G01N 21/25, G01N 21/64

(21) Application number: 01120597.8

(22) Date of filing: 29.08.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 10.01.2001 JP 2001002264

(71) Applicant: Yokogawa Electric Corporation  
Tokyo 180-8750 (JP)

(72) Inventors:  
• Tanaami, Takeo, Yokogawa Electric Corporation  
Musashino-shi, Tokyo 180-8750 (JP)  
• Sugiyama, Yumiko,  
Yokogawa Electric Corporation  
Musashino-shi, Tokyo 180-8750 (JP)


(74) Representative: Henkel, Feiler, Hänzeli  
Möhlstrasse 37  
81675 München (DE)

(54) Biochip reader

(57) The present invention provides a biochip reader for reading image information appropriate for a plurality of samples with an optical detector, by emitting a plurality of light beams onto a biochip on which the plurality of samples are arranged in spots or linear arrays. The biochip reader is configured so that the spatial positions of the plurality of samples and the plurality of light beams agree with each other. Since this biochip reader

configuration requires no scanning, it is possible to read image information from multiple samples at high speed. Furthermore, as long as a comparison is made with reference to the same duration of reading, the required level of light intensity decreases as the number of beams increases. Thus, there is no need for emitting high-intensity beams of laser light as seen in the prior art. Consequently, there is virtually no risk of bleaching fluorescent stain.

FIG.2

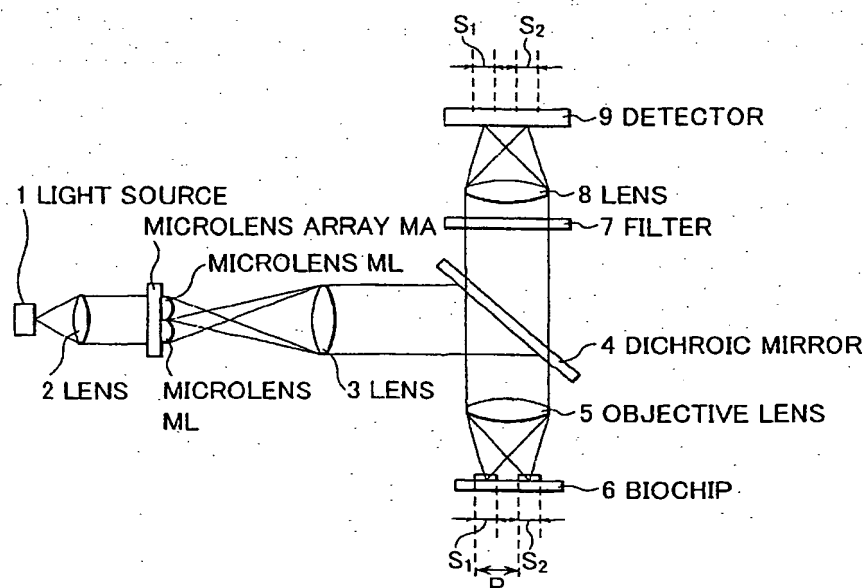

EP 1 223 421 A2

## Description

### BACKGROUND OF THE INVENTION

#### Field of the invention

[0001] The present invention relates to a biochip reader for reading the wavelengths of fluorescence resulting from the excitation of samples on a biochip with excitation light. More specifically, the invention relates to improvements made in order to increase the speed of measurement, simplify the biochip reader, reduce damage to the samples, and make uniform the distribution of intensity within a spot of light that is formed when excitation laser light is condensed with a microlens.

#### Description of the Prior Art

[0002] There has been apparatus for detecting and analyzing DNA or protein segments by marking the segments with a fluorescent substance, emitting laser light onto them, and reading fluorescent light thus produced. In this type of apparatus, a biochip on which such samples as DNA or protein segments marked with a fluorescent substance are spotted in arrays is used.

[0003] FIG. 1 is a conceptual schematic view showing one example of a conventional epi-illuminated biochip reader. In this biochip reader, 1) a plurality of DNA molecules (genes) A, B, C, ... with known sequences are combined and arranged on a substrate PL to form a biochip 6, as shown in FIG. 1a, 2) the biochip 6 is hybridized with an unknown gene  $\alpha$ , as shown in FIG. 1b, and 3) the result of hybridization is read using such a mechanism as shown in FIG. 1c.

[0004] In FIG. 1c, light (laser light) emitted from a light source 1 is collimated by a lens 2, made to pass through a dichroic mirror 4, and then condensed onto the biochip 6 by a lens 3. Light returning from the biochip 6 is changed back to parallel light by means of a lens 3, is reflected by the dichroic mirror 4, and forms an image on a detector 9 by means of a lens 8.

[0005] In this case, a stage (not shown in the figure) on which the biochip 6 is mounted is moved in the X/Y-axis direction by drive means (not shown in the figure) so that the surface of the biochip 6 is optically scanned and a surface image is obtained.

[0006] However, such a prior art biochip reader as described above has had problems. One problem is that the stage is scanned using a single spot of light beamed at the biochip 6, in order to obtain the surface image of the biochip. This method is disadvantageous since a stage drive mechanism is complex and it takes a long time to obtain the image.

[0007] Another problem is that the intensity of a light beam must be high in the case of the prior art biochip reader. This is also disadvantageous since a high level of light intensity causes fluorescent stain to bleach more easily.

[0008] Yet another problem is that a spot of high-intensity light is liable to cause the detector 9 or a subsequent A/D converter to saturate. For this reason, the gain of the detector or converter must be lowered. This is also disadvantageous since lowering the gain prohibits the measurement of weak light and, therefore, results in a narrower dynamic range of measurement.

### SUMMARY OF THE INVENTION

[0009] An object of the present invention is to solve the above-mentioned problems by providing a biochip reader that eliminates the need for moving a stage on which samples are placed, as practiced in the prior art, and that involves virtually no risk of bleaching fluorescent stain. Thus, the present invention is intended to provide a simple-structured biochip reader capable of measuring even weak light.

[0010] In order to attain the above-described object, a biochip reader is provided for reading image information appropriate for a plurality of samples with an optical detector, by emitting a plurality of light beams onto a biochip on which the plurality of samples are arranged in spots or linear arrays, wherein the biochip reader is configured so that the spatial positions of the plurality of samples and the plurality of light beams agree with each other, as defined in claim 1 of the present invention.

[0011] This biochip reader configuration eliminates the need for moving a stage and permits non-scanned reading of image information from a plurality of samples. Furthermore, as long as a comparison is made with reference to the same duration of reading, the required level of light intensity decreases as the number of beams increases. Thus, there is no need for emitting high-intensity beams of laser light, as seen in the prior art and, therefore, there is virtually no risk of bleaching fluorescent stain. Consequently, it is possible to realize a biochip reader capable of measuring even weak light.

[0012] As described in claim 2 of the present invention, in the above-mentioned biochip reader configuration, it is also possible for a light beam emitted onto any one of the plurality of samples to form an image at a position on the optical axis different from any position on the surface of the sample. As a result, a spot of light on the biochip will have an almost uniform intensity distribution across its entirety, and the distribution of excitation light intensity will no longer affect the sample.

[0013] Note that when a biochip is mounted at a position on the optical axis beyond the focal point of an objective lens, the working distance increases and therefore the efficiency of such work as mounting or removing the biochip improves.

[0014] As described in claim 3 of the present invention, it is also possible for a fluorescent image from the above-mentioned sample to form at a position on the optical axis different from any position on the surface of a detector. As a result, it is possible to reduce intensity bias in the detector or an A/D converter, and thus widen

the dynamic range of measurement.

[0015] As described in claim 4 of the present invention, the above-mentioned emitted light beam may be made obliquely incident on the sample, so that the fluorescent image from the sample and the image of excitation light are separated from each other. As a result, background noise due to the excitation light can be removed.

[0016] As described in claim 5 of the present invention, the fluorescent image and the image of excitation light from the sample may be formed at positions on the detector distant from each other. As a result, it is possible to easily remove the reflection image of excitation light during the image processing stage.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0017]

FIG. 1 is a schematic view showing one example of a prior art biochip reader.

FIG. 2 is a schematic view showing one embodiment of the biochip reader according to the present invention.

FIG. 3 is a schematic view showing a comparison in size between the spots of the image and samples.

FIG. 4 is a schematic view showing another embodiment of the biochip reader according to the present invention.

FIG. 5 is a schematic view showing a comparison in size between the focal spots and samples.

FIG. 6 is a graph showing a comparison in the intensity distribution between the spots of beams in focus and out of focus.

FIG. 7 is a schematic view showing one embodiment of how a biochip is positioned in a biochip reader.

FIG. 8 is a schematic view illustrating the case when a light beam incident on a biochip is inclined.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0018] Preferred embodiments will now be described in detail with reference to the accompanying drawings. FIG. 2 is a schematic view showing one embodiment of the biochip reader according to the present invention. In FIG. 2, beams of light from a light source 1 are collimated by a lens 2 and condensed by the microlenses ML of a microlens array MA arranged at the same spacing interval as the pitch P of samples on a biochip 6. Then,

the beams are collimated by a lens 3, reflected by a dichroic mirror 4, and form images on the biochip 6 by means of an objective lens 5.

[0019] Respective spots on the biochip 6 are excited by the beams condensed thereupon, thereby causing the spots to emit fluorescent light. The fluorescent light passes through the objective lens 5, the dichroic mirror 4 and a filter 7 in this sequence, and forms an image on the detector 9 by means of a lens 8. Consequently, it is possible to obtain the surface image of samples without having to perform optical scanning.

[0020] Note that the size A of image spots formed by the microlens array MA is designed to be basically the same as the sizes S1, S2, . . . of samples, as shown in FIG. 3.

[0021] FIG. 4 is a schematic view showing another embodiment of the biochip reader according to the present invention. Note that in the case of the biochip reader of FIG. 2, spots on the biochip are excited under the intensity distribution of spots of light condensed by the lens 5. Therefore, fluorescent light is produced in a non-uniform manner within each spot of the biochip. As a result, the magnitude of excitation is high in the middle area of the spot, whereas the magnitude is low in the peripheral area. Thus, the intensity distribution affects the intensity of fluorescence itself. In other words, high-intensity fluorescence occurs in the middle area, whereas only low-intensity fluorescence occurs in the peripheral area. Furthermore, fluorescent stain bleaches more easily in the middle area than in the peripheral area.

[0022] The biochip reader of FIG. 4 according to the present invention is the result of solving such problems as noted above. Although the respective elements of FIG. 4 are identical to those of FIG. 2, the biochip reader of FIG. 4 differs from that of FIG. 2 in that emitted light is focused at a position on the optical axis different from any position on the surface of the biochip 6.

[0023] In FIG. 4, beams of light from the light source 1 are collimated by a lens 2 and condensed by a microlens array MA arranged at the same spacing interval as the pitch P of samples on a biochip 6. The process of operation up to this point is the same as that seen in the embodiment of FIG. 2.

[0024] The beams are then reflected by a dichroic mirror 4 and focused at a position on the optical axis (indicated by dashed lines in FIG. 4) different from any position on the surface of the biochip 6, by means of the objective lens 5. In other words, the beams are placed in an off-focus state (defocused) on the biochip 6.

[0025] Consequently, the focal spots A of beams emitted to the samples are greater than the sizes S1, S2, S3 and S4 of the samples, as shown in FIG. 5.

[0026] FIG. 6 is a graph showing a comparison in the intensity distribution between the spots of beams in focus and out of focus emitted to a sample. As is also evident from this figure, off-focus spots A have an almost uniform distribution of intensity within the size-S1, -S2, -S3 and -S4 spots on the biochip.

[0027] Each spot on the biochip is excited by this defocused beam of laser light and emits fluorescent light. This fluorescent light passes through the objective lens 5, the dichroic mirror 4 and a filter 7, and forms an image on the detector 9 by means of a lens 8. In this case, the position of the image-forming lens 8 is pre-adjusted so that both the image-formed surface of the detector 9 and the surface of the biochip 6 have the same focal length.

[0028] As described above in accordance with the present invention, spots on the biochip are excited in their entirety under an almost uniform distribution of light intensity. Consequently, it is possible to easily obtain a fluorescent image virtually free from effects due to the intensity distribution of excitation light.

[0029] In FIG. 4, the biochip is mounted at a position on this side of the focal point of the objective lens 5. Alternatively, the biochip may be mounted at a position on the far side of the focal point, as shown in FIG. 7. This method of mounting is advantageous since a working distance  $d$  increases, thereby facilitating such work as mounting or removing the biochip.

[0030] In the above-mentioned mounting method, it is preferable that an image of spots on the biochip be formed on the detector 9 in an out of focus manner. This strategy makes it possible to reduce intensity bias in the detector (e.g., CCD) or a subsequent A/D converter, and thus widen the dynamic range of measurement.

[0031] It may also be possible to incline beams of excitation light incident on the biochip 6, as shown in FIG. 8a. As a result, the excitation light does not retrace its original optical path, and so background noise due to the excitation light can be removed. It is particularly advantageous to form a fluorescent image and the reflection image of the excitation light in such a manner that the images do not overlap with each other on the detector 9, as shown in FIG. 8b, because background noise can be easily removed during later image processing.

[0032] Even if the incident light is inclined as shown in FIG. 8, fluorescent light is emitted over a 360-degree range. Accordingly, the excitation light is condensed without any loss by the objective lens to form an image on the detector 9.

[0033] It may also be possible to incline the biochip 6 itself at an angle to the axis of incidence, rather than inclining the incident light, while keeping the optical axis of the incident light vertical.

[0034] In the above-described embodiments, only the case of circular samples is cited, though the samples may also be rectangular or linear.

[0035] As described heretofore, the present invention has the following advantageous effects:

[0036] 1) It is possible to read image information from a plurality of samples without the need for moving the stage, as practiced in the prior art, and scanning the samples. Consequently, the speed of measurement can be easily increased.

[0037] Furthermore, as long as a comparison is made with reference to the same duration of reading, the re-

quired level of light intensity decreases as the number of beams increases. Thus, there is no need for emitting high-intensity beams of laser light as seen in the prior art. This means there is virtually no risk of bleaching fluorescent stain. Consequently, it is possible to provide a simple-structured biochip reader capable of measuring even weak light.

[0038] 2) It is possible for a light beam emitted onto any one of the plurality of samples to form an image at a position on the optical axis different from any position on the surface of the sample. As a result, a spot of light on the biochip will have an almost uniform intensity distribution across its entirety, and the distribution of excitation light intensity will no longer affect the sample.

[0039] 3) It is possible for a fluorescent image from a sample to form at a position on the optical axis different from any position on the surface of a detector. As a result, it is possible to reduce intensity bias in the detector or a subsequent A/D converter, and thus easily widen the dynamic range of measurement.

[0040] 4) The biochip reader may be configured in such a manner that an emitted light beam is made obliquely incident on a sample. As a result, a fluorescent image and the image of excitation light from the sample are separated from each other, and so background noise due to the excitation light can be removed.

[0041] 5) The biochip reader may be configured such that a fluorescent image and the reflection image of excitation light from samples form at positions on the detector distant from each other. As a result, it is possible to easily remove the reflection image during the image processing stage.

## Claims

1. A biochip reader for reading image information appropriate for a plurality of samples with an optical detector, by emitting a plurality of light beams onto a biochip on which said plurality of samples are arranged in spots or linear arrays, wherein said biochip reader is configured so that the spatial positions of said plurality of samples and said plurality of light beams agree with each other.
2. The biochip reader of claim 1, wherein a light beam emitted to each of said plurality of samples forms an image at a position on an optical axis different from any position on the surface of said sample.
3. The biochip reader of claim 1, wherein a fluorescent image from said sample forms at a position on an optical axis different from any position on the surface of said detector.
4. The biochip reader of claim 1, wherein said emitted light beam is made obliquely incident on said sample so that a fluorescent image from said sample

and the image of excitation light are separated from each other.

5. The biochip reader of claim 4, wherein said fluorescent image from said sample and said image of excitation light form at positions on a detector distant from each other.

5

10

15

20

25

30

35

40

45

50

55

5

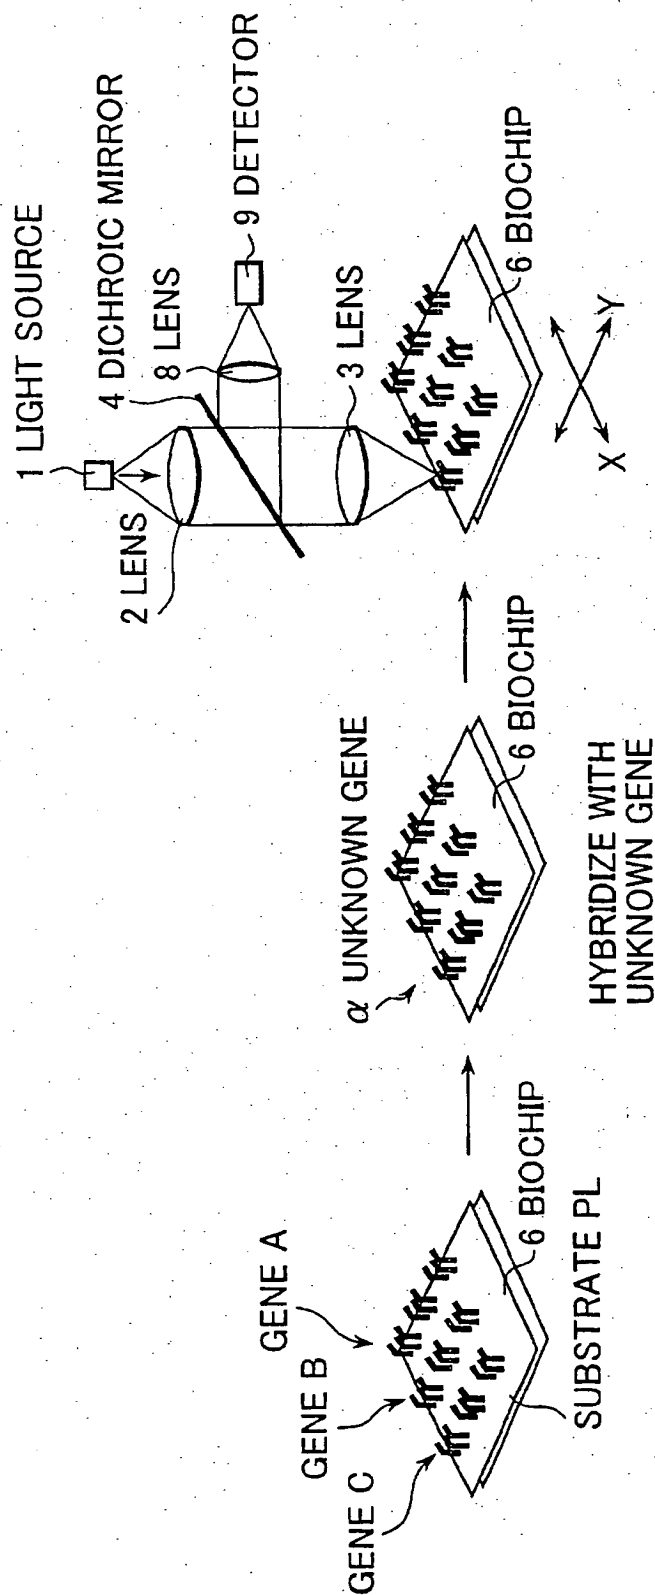


FIG.1(c)  
PRIOR ART

FIG.1(b)  
PRIOR ART

FIG.1(a)  
PRIOR ART

FIG.2

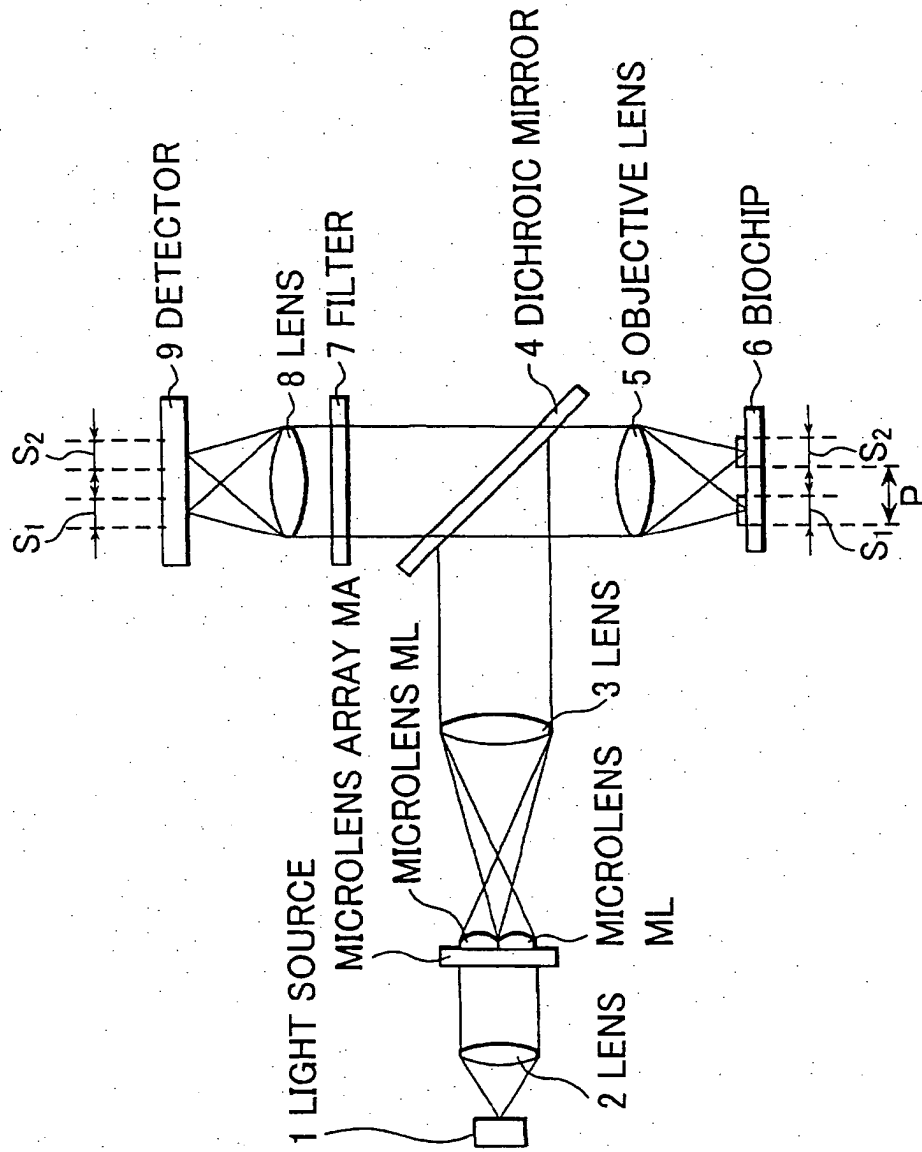


FIG.3

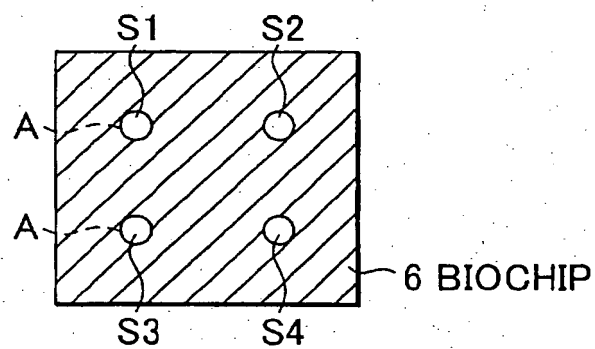




FIG.4

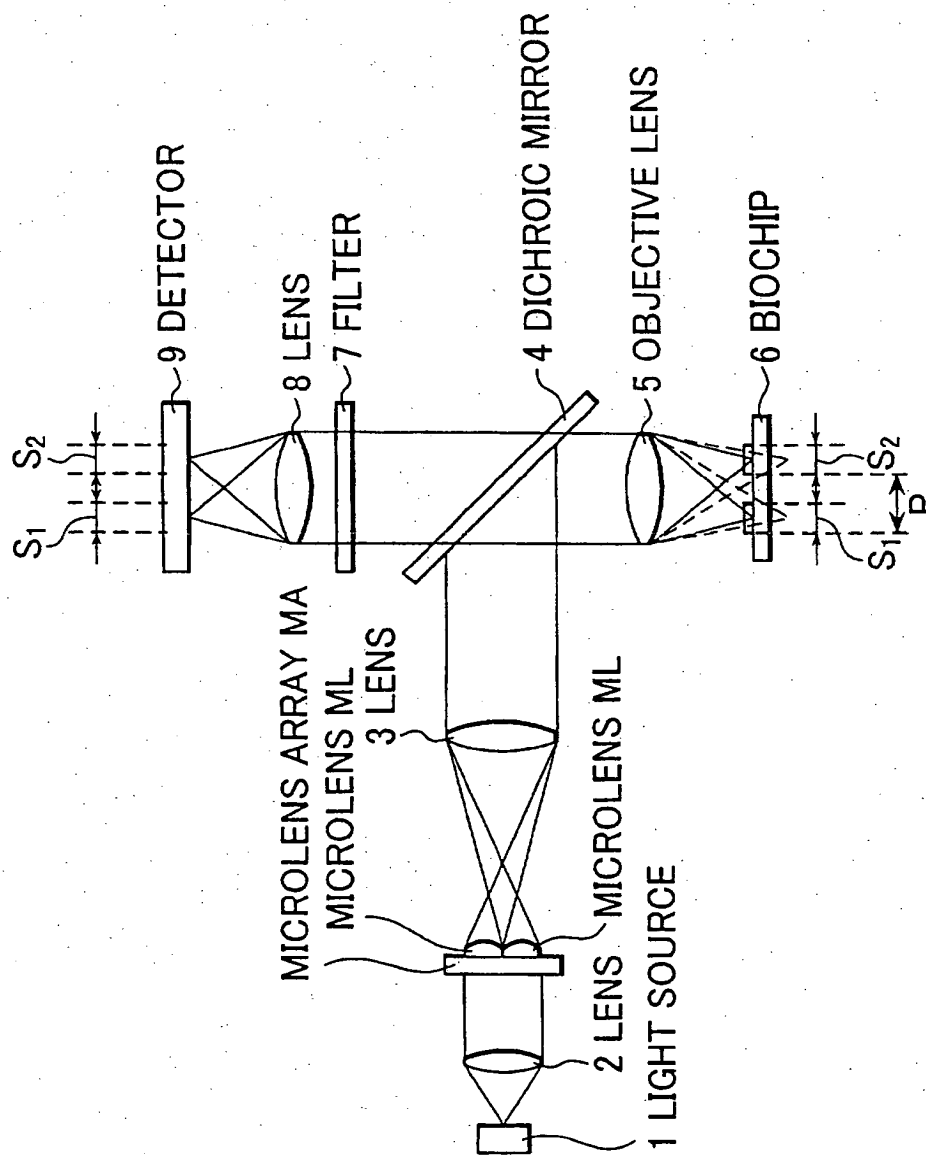


FIG.5

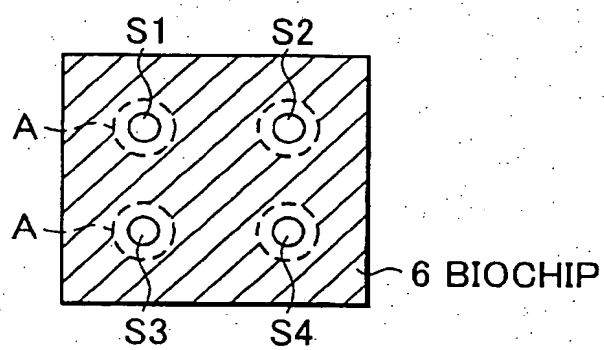


FIG.6

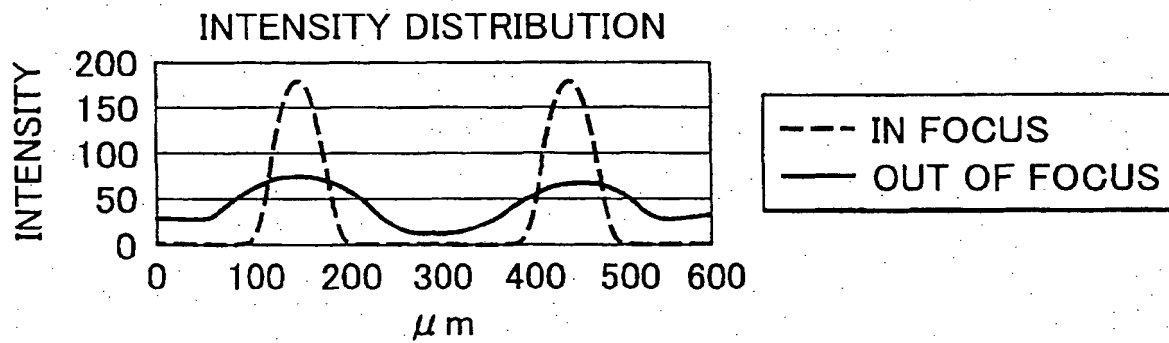


FIG.7

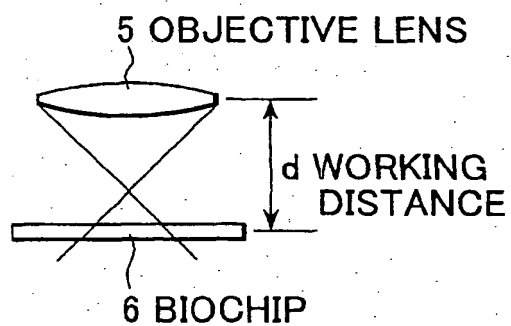


FIG.8(a)



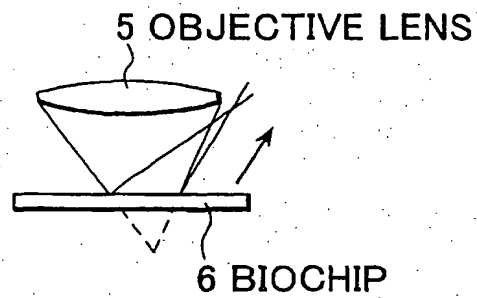


FIG.8(b)

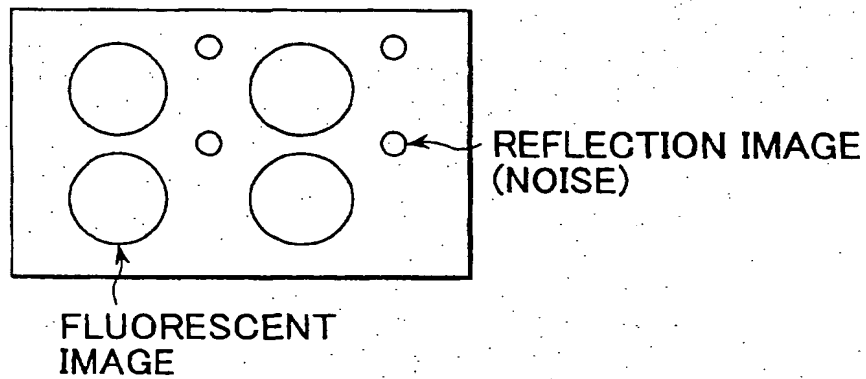



(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 223 421 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
24.07.2002 Bulletin 2002/30

(51) Int Cl.7: **G01N 21/25, G01N 21/64**

(43) Date of publication A2:  
17.07.2002 Bulletin 2002/29

(21) Application number: 01120597.8

(22) Date of filing: 29.08.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• Tanaami, Takeo, Yokogawa Electric Corporation  
Musashino-shi, Tokyo 180-8750 (JP)  
• Sugiyama, Yumiko,  
Yokogawa Electric Corporation  
Musashino-shi, Tokyo 180-8750 (JP)

(30) Priority: 10.01.2001 JP 2001002264


(71) Applicant: Yokogawa Electric Corporation  
Tokyo 180-8750 (JP)

(74) Representative: Henkel, Feiler, Hänzel  
Möhlstrasse 37  
81675 München (DE)

(54) **Biochip reader**

(57) The present invention provides a biochip reader for reading image information appropriate for a plurality of samples with an optical detector, by emitting a plurality of light beams onto a biochip on which the plurality of samples are arranged in spots or linear arrays. The biochip reader is configured so that the spatial positions of the plurality of samples and the plurality of light beams agree with each other. Since this biochip reader

configuration requires no scanning, it is possible to read image information from multiple samples at high speed. Furthermore, as long as a comparison is made with reference to the same duration of reading, the required level of light intensity decreases as the number of beams increases. Thus, there is no need for emitting high-intensity beams of laser light as seen in the prior art. Consequently, there is virtually no risk of bleaching fluorescent stain.

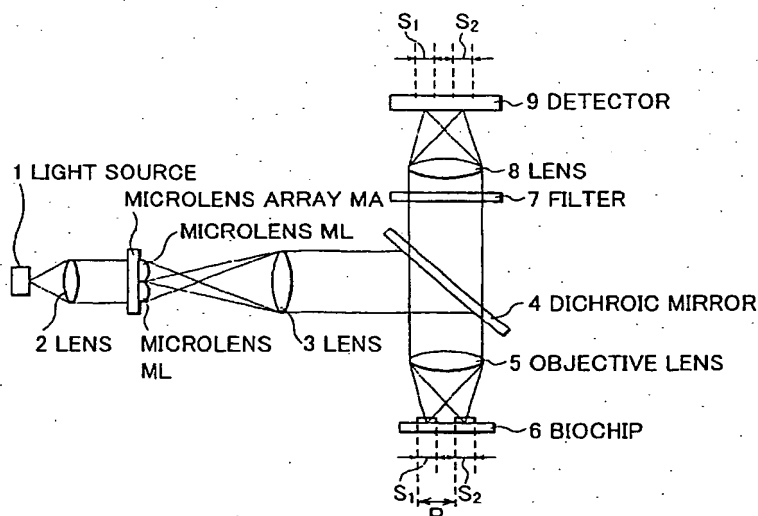**FIG.2****EP 1 223 421 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 0597

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 98 28775 A (HELL STEFAN) 2 July 1998 (1998-07-02) * page 9-11; figures 1,4 *	1-5	G01N21/25 G01N21/64
X	US 4 892 409 A (SMITH HARRY F) 9 January 1990 (1990-01-09) * column 5, line 1-15; figure 4B *	1-5	
X	BOGDANOV V ET AL: "PARALLEL, CONFOCAL, AND COMPLETE SPECTRUM IMAGER FOR FLUORESCENT DETECTION OF HIGH-DENSITY MICROARRAY" PROCEEDINGS OF THE SPIE, SPIE, BELLINGHAM, VA, US, vol. 3605, 24 January 1999 (1999-01-24), pages 298-307, XP000917120 * page 299 - page 303; figures 1,2 *	1-5	
X	WO 00 63680 A (CHROMAGEN ;CONRAD MICHAEL (US); GOULD GENE R (US)) 26 October 2000 (2000-10-26) * page 8 * * page 22 *	1-5	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G01N
X	US 5 827 748 A (GOLDEN JOEL P) 27 October 1998 (1998-10-27) * column 3, line 40 - line 55; figure 2 *	1-5	
X	GB 2 351 556 A (CAMBRIDGE IMAGING LTD) 3 January 2001 (2001-01-03) * figure 2 *	1-15	
X	DE 197 48 211 A (ZEISS CARL FA) 6 May 1999 (1999-05-06) * column 2, line 30-50; figure 2 *	1-5	
-/-			
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 29 May 2002	Examiner Mason, W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P/0401)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 0597

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 197 25 050 A (FRAUNHOFER GES FORSCHUNG ; INST PHYSIKALISCHE HOCHTECH EV (DE)) 17 December 1998 (1998-12-17) * column 4-5; figure 2 *	1-5	
A	DE 199 19 092 A (ZEISS CARL JENA GMBH) 2 November 2000 (2000-11-02) * figure 1 *	1-5	
A	WO 96 23213 A (MURRAY ANTHONY J ; STEGEMANN JOSEF (DE); ANSORGE WILHELM (DE)) 1 August 1996 (1996-08-01) * figures 1,3A *	1-5	
A	US 5 112 134 A (HUMPHRIES GILLIAN M ET AL) 12 May 1992 (1992-05-12) * column 6-7; figure 1 *	1-5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>29 May 2002</b>	Examiner <b>Mason, W</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons % : member of the same patent family, corresponding document	

EP 01 12 0597 (1998-12-17)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 0597

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-05-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
WO 9828775	A	02-07-1998	DE	19653413 A1	25-06-1998
			DE	59706687 D1	25-04-2002
			WO	9828775 A2	02-07-1998
			EP	0898783 A2	03-03-1999
			US	6262423 B1	17-07-2001
US 4892409	A	09-01-1990	NONE		
WO 0063680	A	26-10-2000	AU	4651200 A	02-11-2000
			EP	1192446 A1	03-04-2002
			TW	432203 B	01-05-2001
			WO	0063680 A1	26-10-2000
US 5827748	A	27-10-1998	NONE		
GB 2351556	A	03-01-2001	AU	4307700 A	31-01-2001
			EP	1190232 A1	27-03-2002
			WO	0101112 A1	04-01-2001
DE 19748211	A	06-05-1999	DE	19748211 A1	06-05-1999
			AU	9749898 A	24-05-1999
			CA	2307837 A1	14-05-1999
			WO	9923474 A1	14-05-1999
			EP	1027591 A1	16-08-2000
DE 19725050	A	17-12-1998	DE	19725050 A1	17-12-1998
			WO	9857151 A1	17-12-1998
			EP	0988526 A1	29-03-2000
DE 19919092	A	02-11-2000	DE	19919092 A1	02-11-2000
			WO	0065325 A2	02-11-2000
			EP	1173747 A2	23-01-2002
WO 9623213	A	01-08-1996	EP	0805974 A1	12-11-1997
			JP	10513553 T	22-12-1998
			WO	9623213 A1	01-08-1996
US 5112134	A	12-05-1992	AT	65607 T	15-08-1991
			AU	624621 B2	18-06-1992
			AU	3780789 A	19-10-1989
			AU	4063285 A	24-09-1985
			CA	1269705 A1	29-05-1990
			CA	1301250 A2	19-05-1992
			DE	3583561 D1	29-08-1991
			DK	503985 A	01-11-1985
			EP	0172892 A1	05-03-1986

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 0597

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-05-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5112134 A		JP 7109414 B	22-11-1995
		JP 61501723 T	14-08-1986
		KR 9204531 B1	08-06-1992
		WO 8504018 A1	12-09-1985
		US 5500188 A	19-03-1996
		US 4968148 A	06-11-1990
		US 4591550 A	27-05-1986

EPO FORM P469

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82